


<b>DRAWING &amp; MARKING</b>		Flame retardant epoxy resin (UL94V-0)
Protection/Coating 外包装	Resin filled 灌封	
Lead Wire 导线	Colour 颜色	Φ 0.8 tinned steel copper wires red

**DN**

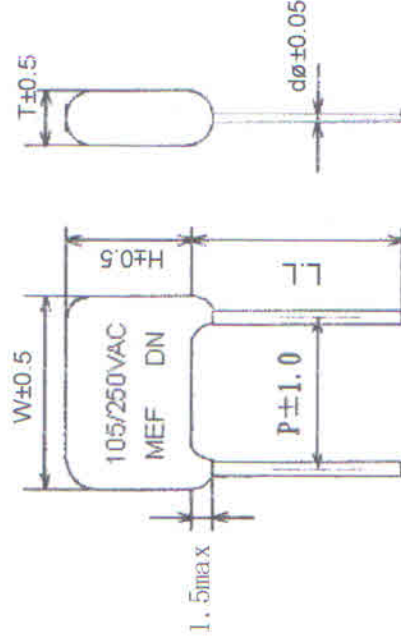

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ 250VAC
	1.0 µF			Construction 结构	Winding
Dielectric 介质	Polyester film	Plates 导体	Metallized Aluminum		
			50~60KHZ 1KHZ 10KHZ 150KHZ		
Dissipation Factor 损失角	@ 1K HZ 1Vrms 25°C max			1.00% 1.50%	
	1.6 times of rated voltage for 5 seconds cut off current at 10mA		DC lead to lead DC lead to case AC lead to lead AC lead to case	400VDC .....VDC .....VAC .....VAC	
Test Voltage 测试电压				500VDC	
			Lead to lead Lead to case	>3000 MΩ*uf .....MΩ	
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 250VACx 200% 1To 5 sec max		Max pulse rise time	(v/sec)	
	20°C@ 100 VDC 60 seconds min 20°C@.....VDC..... seconds min			Amps .....Amps	
Insulation Resistance 绝缘阻抗				VDC	
dv/dt 单位时间电压变化率					
IpeakA 最大峰值电流	@70°C				
IrmsA 有效值电流	@70°C				
Surge/Pulse voltage 冲击电压	140% rated voltage max				
E.S.R 等效串联阻抗抗值					

Safety approval 安规认证	Confirmation area 客户承认签字区		Standard 依据标准	IEC384-2
	Dimension(尺寸)mm			
Remark 备注:	W±0.5	H±0.5	T±0.5	P±1.0
	23.5	9.7	4.9	22.5
	dφ±0.05	L.L±3.0		
	0.8	25.0±3.0		
Design code 设计代码:	Operating Temperature 工作温度范围 From Minus -40 °C to Plus +85°C		Designer 设计师	MEF 105J250VAC P:22.5
	DATE 日期: 2016-07-1		Drawing 绘图员	
3RD ANGLE PROJECTION 第三角法		Approval 审批	Drawing 图号	
SCALE	~	UNIT	mm	

