


P/N: X2 224K310VAC P=22.5MM

DRAWING & MARKING		Protection/Coating 外封装	PBT plastic box
		Resin filled 灌封	Flame retardant
		Lead Wire 导线	Φ 0.6 tinned wires
		Colour 颜色	yellow

DAIN

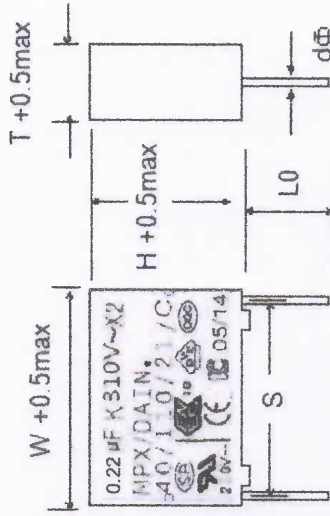

激光印字

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	Rated Voltage 额定电压	@ 25°C 50/60HZ	310VAC	
	0.22 μF		Construction 结构		Winding	
Dielectric 介质	Polypropylene film	Plates 导体	Metalized film			
			50~60HZ			
Dissipation Factor 损失角			1KHZ	0.10%		
			10KHZ	0.15%		
Test Voltage 测试电压			150KHZ	1333VDC		
			DC lead to leadVDC		
Dielectric Withstanding Voltage 介质耐压强度			DC lead to caseVDC		
			AC lead to leadVAC		
Insulation Resistance 绝缘阻抗			AC lead to caseVAC		
				1800VDC		
dv/dt 单位时间电压变化率			Lead to lead	>5000 MΩ*uf		
			Lead to caseMΩ		
IpeakA 最大值电流			Max pulse rise time	(v/sec)		
				Amps		
IrmsA 实效值电流			Amps		
				VDC		
Surge/Pulse voltage 冲击电压			Standard 依循标准	IEC60384-14		
E.S.R 等效串联阻抗抗值			Dimension(尺寸)mm			
			W	H	T	S
Safety approval安规认证			26.5(±0.5)	15(±0.5)	6(±0.5)	22.5±1.0
			dφ	L0		
Remark 备注:			0.6±0.05	25.0±3.0		
			Confirmation area 客户承认签回区			

Safety approval安规认证			Design code 设计代码:	X2 224K310VAC P=22.5
			Designer 设计师	
Remark 备注:	Operating Temperature 工作温度范围 From Minus -40 °C to Plus +110°C		Drawing 绘图员	Approval 核准
	DATE 日期: 2019-04-01		Drawing NO.	
3RD ANGLE PROJECTION 第三角法		SCALE	UNIT	mm

B.P.Impex Pvt. Ltd. , 12/4, 1st Floor, East Patel Nagar, New Delhi 110008.